

UV-A Sensor(High Sensitivity)

GUVA-T21LD-L




Features	Gallium Nitride Based Material Schottky-type Photodiode Photovoltaic Mode Operation Good Visible Blindness High Responsivity & Low Dark Current
Lens Type UV Sensor	



Applications	Full UV Band Monitoring UV-A Lamp Monitoring Flame detector
---------------------	--------------------------------------------------------------------------

Outline Diagrams and Dimensions

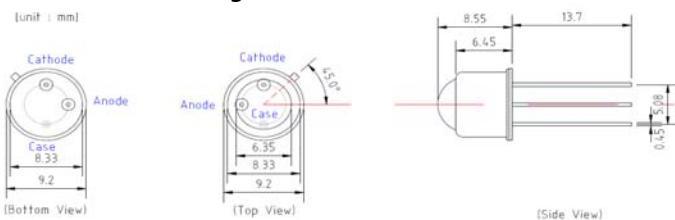

Absolute Maximum Ratings


Parameter	Symbol	Min.	Max.	Unit	Remark
Storage Temperature	T_{st}	-40	90	°C	
Operating Temperature	T_{op}	-30	85	°C	
Reverse Voltage	$V_{r, max.}$		5	V	
Forward Current	$I_{f,max.}$		1	mA	
Optical Source Power Range	P_{opt}	0.01	100	mW/cm ²	UVA Lamp
Soldering Temperature	T_{sol}		260	°C	within 10 sec.

※Notice: apply to us in the case that Optical Source Power is over 100mW/cm²


Characteristics (at 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Dark Current	I_d			20	nA	$V_r = 0.1 V$
Photo Current	I_{ph}		12		μA	UVA Lamp, 1mW/cm ²
Temperature Coefficient	I_{tc}		0.05		%/°C	UVA Lamp
Responsivity	R		0.72		A/W	$\lambda = 350 nm, V_r = 0 V$
Spectral Detection Range	λ	230		370	nm	10% of R
Active area			1.536		mm ²	

Responsivity Curve

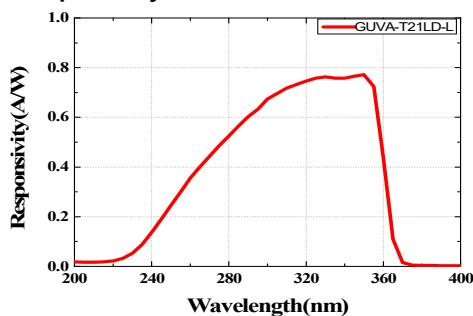

Photocurrent along UV Power

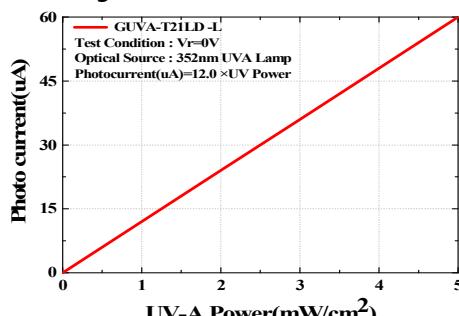

Caution

ESD can damage the device hence please avoid ESD. Insulate the cap of TO-CAN or it can cause malfunction of the device.